



BPI® METRIC ANCHOR COUPLER

THREADED COUPLER WITH METRIC & STANDARD UNC THREADS

- **HIGH STRENGTH CONNECTION** – Suitable for connecting to mechanical anchors approved for use in concrete with a specified strength (f_c') of up to 8,000 psi per ACI 318-14 Section 17. Proof tested in-air to develop 1.25 x specified yield strength (f_y) of Grade 60 reinforcing bar – far in excess of anchor capacity.
- **PRE-FABRICATED THREADED BARS** – Couplers can be provided with threaded bars made by BPI® to your dimensions – straight, hooked 90° - 180°, single or double-ended connections and other configurations.
- **STANDARD GRADE 60 REINFORCING BARS** – Each heat lot provided by BPI® is controlled, tested and certified, ASTM A615 or A706 uncoated deformed bars, ASTM A775 epoxy coated reinforcing bars, ASTM A955 stainless steel reinforcing bars or ASTM A767 galvanized reinforcing bars.
- **APPLICATIONS** – Used to splice BPI® threaded rebar, bolts or threaded rod with UNC threads to stud anchors, wedge anchors, undercut anchors or safety studs with metric threads.

The BPI® Metric Anchor Coupler is manufactured with metric threads to attach concrete anchors to standard Unified National Coarse threads of BPI® threaded rebar, standard bolts or threaded rod.

- ▶ BPI® threaded reinforcement bars can be provided straight or bent to specific customer requirements
- ▶ Couplers can be uncoated, epoxy coated, stainless (type 303) or hot dipped galvanized
- ▶ Available in metric sizes M10 through M24
- ▶ Use with BPI® threaded rebar, bolts or threaded rod with UNC threads

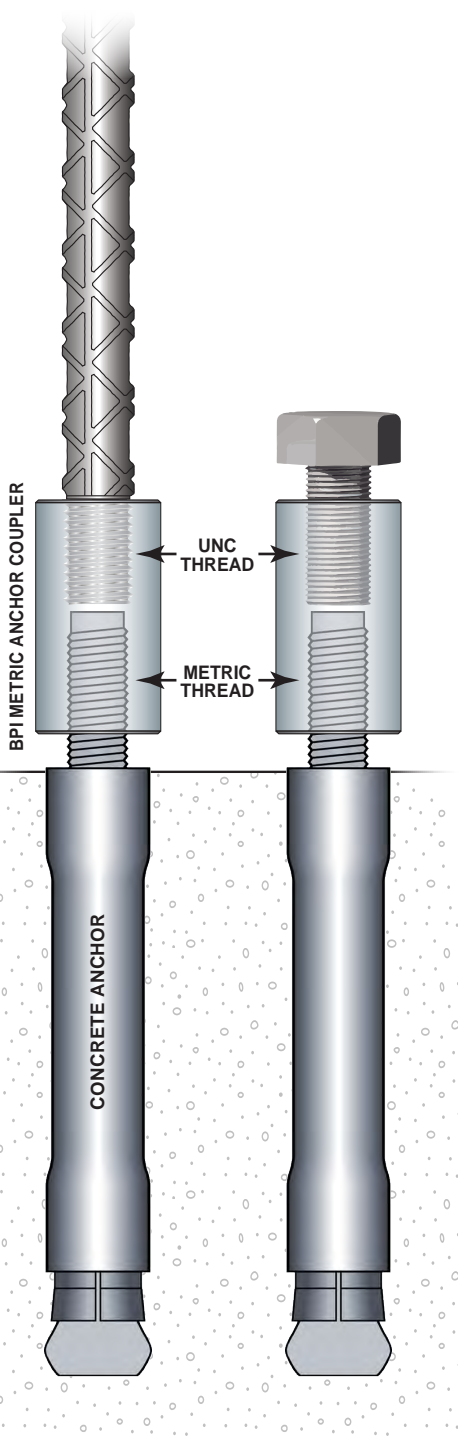

Rebar Size US [Metric]	Product Code	Metric Thread Size	UNC Thread Size	Weight (lbs)	Length L (in)	DIAMETER D (in)
4 [13]	M10/04	M10 x 1.5	1/2 - 13 UNC	0.27	2	7/8
4 [13]	M12/04	M12 x 1.75	1/2 - 13 UNC	0.25	2	7/8
5 [16]	M12/05	M12 x 1.75	5/8 - 11 UNC	0.39	2 3/8	1
5 [16]	M16/05	M16 x 2.0	5/8 - 11 UNC	0.34	2 3/8	1
6 [19]	M16/06	M16 x 2.0	3/4 - 10 UNC	0.50	2 5/16	1 3/16
6 [19]	M20/06	M20 x 2.5	3/4 - 10 UNC	0.44	2 5/16	1 3/16
7 [22]	M20/07	M20 x 2.5	7/8 - 9 UNC	0.56	2 3/4	1 1/4
7 [22]	M24/07	M24 x 3.0	7/8 - 9 UNC	0.89	2 3/4	1 1/2
8 [25]	M24/08	M24 x 3.0	1 - 8 UNC	0.97	3 1/4	1 1/2

Unless otherwise specified, bars shall be ASTM A615 Grade 60; epoxy coated bars shall be ASTM A775 Grade 60; galvanized bars shall be ASTM A767 Grade 60; bend diameters and standard hook dimensions shall be per ACI Detailing Manual SP-66; length tolerances shall be per the CRSI Manual of Standard Practice. Customer is responsible for notifying BPI of any special space restrictions, tolerance, bar grade, coating thickness and/or strength requirements before placing order. All fabricated and/or in-process threaded bars and parts are noncancelable and non-returnable.

While the information contained in this document is believed to be accurate at the time of publication, BPI reserves the right to make changes, design modifications, corrections and other revisions as it sees fit, without notice. All products described herein are supplied in accordance with BPI's standard Terms and Conditions of Sale. This document is of a promotional nature only. Aspects of structural design, evaluation of product fitness for use, suitability or similar attributes are the responsibility of others.



**DOWNLOAD THE FREE BARSPlice APP
AND FOLLOW US ON SOCIAL MEDIA!**



Barsplice Products, Inc., 4900 Webster Street, Dayton OH 45414, USA
Tel: (937) 275-8700 • Fax: (937) 275-9566 • E-mail: bar@barsplice.com

Copyright © 2019, Barsplice Products, Inc., "BPI". All rights reserved. www.barsplice.com

